


SR: SR



FI: FI

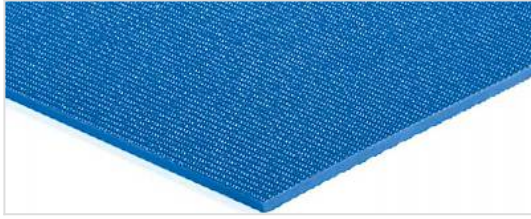

PU65A / PU55D

FBFNG750X19L

SR

SR	SR
SR	1,9 mm
SR	21 mm
SR	0.5...3%
1%SR	0,9 N/mm
1%SR	0,63 N/mm

SR	SR2
SR	2,28 kg/m²
SR	-30°...+60°C
SR	750 mm
SR	730 mm
SR	SR

SR	SR	SR
SR	72° Shore A (±3)	55° Shore D (±3)
SR μ	0,7	0,25
SR	SR	SR
SR	0,8 mm	1,1 mm
SR	SR	SR
SR	FDA (Food and Drug Administration)	FDA (Food and Drug Administration)
	SR	SR
	SR	SR
	SR	2K
	SR	
	2K	

SR
REACH EC 1907/2006
EG 1935/2004
EG 10/2011
FDA (Food and Drug Administration)

SR	SR
SR	SR
SR	150/205 °C
SR	260°C ±10°C
SR	90 sek.

SR: SR


SR - 10/2026

Icons

BEHAbelt icons represent the various properties and features of our products.




Complies with FDA/EC standards



Electrostatically dissipative




Safe for X-ray and MRI scans (PU SAFE)




Antibacterial and antifungal



Waterproof and oil-resistant



Micro Clean (ISO 14644-1)



UV-C resistant



2K (two-component) system




Vegan



ISO 340 (flame retardant)




Flexible and bendable



Flexible and bendable

Applications

BEHAbelt products are used in various applications:



PU and TPE conveyor belt



PU and TPE components



PU and TPE connector



PU and TPE V-belt



PU and TPE gear