


RI



□□□: □□□□□□□□SM□

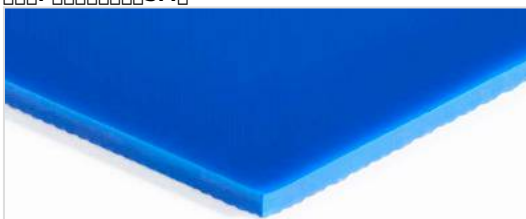

□□:
PU65A

□□:
FBFG750X30LA

Technische Daten			
Material	Aluminium	Farbe	Anthrazit
Stärke	3 mm	Gewicht	2,7 kg/m²
Profilhöhe	18 mm	Temperaturbereich	-30°C...+40°C
Verpackungseinheit	1...5%	Standardlänge	750 mm
1% Bruchdehnung	0,36 N/mm	Standardbreite	730 mm
1% Bruchdehnung	0,25 N/mm	Standarddicke	3 mm

項目	規格	規格
表面粗さRa	72° Shore A (±3)	72° Shore A (±3)
表面粗さμ	0,75	0,8
材質	ステンレス鋼	ステンレス鋼
寸法	n/a	n/a
重量	ステンレス鋼RI	ステンレス鋼SM
承認	FDA (Food and Drug Administration)	FDA (Food and Drug Administration)
	ISO 9001	ISO 9001
	ISO 14001	ISO 14001
	ISO 45001	MicroClean

REACH	EC 1907/2006	2008
EG	1935/2004	2004
EG	10/2011	2011
FDA (Food and Drug Administration)		

[illegible][illegible]

XXXXXXXXXXXXXXXXXXXX - 10/2026

BEHAbelt

BEHAbelt 提供多種規格之工業用帶，適用於各種工業應用。




符合 FDA/EC 標準



符合 X 光機安全標準 PU SAFE



具有優異之防水性能




UV-C 防護



純素製品



多種規格之工業用帶



具有優異之導電性能



具有優異之抗菌性能




具有優異之清潔性能



2 組工業用帶




ISO 340 標準



多種規格之工業用帶

工業用帶

提供多種規格之工業用帶




PU 及 TPE 工業用帶



PU 及 TPE 工業用帶



PU 及 TPE 工業用帶



多種規格之 V 型工業用帶



PU 工業用帶