




Material: **LGB**



Material: **FI**

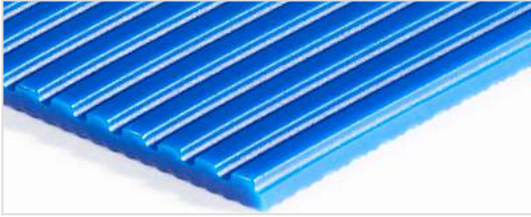

Material: **PU80A**

Material: **FBFJ750X16LK**

Technical Data		Physical Properties	
Material		Material	
Thickness	1,6 mm	Density	1,92 kg/m ²
Width	15 mm	Temperature Range	-20°C...+60°C
Height	15 mm	Length	750 mm
		Width	730 mm
		Weight	

Property	Material LGB	Material FI
Shore A Hardness	84° Shore A (±3)	84° Shore A (±3)
Permeability (μ)	n/a	0,5
Color	Blue	Blue
Surface Finish	n/a	n/a
Material	Material LGB	Material FI
Approval	FDA (Food and Drug Administration)	FDA (Food and Drug Administration)
Special Features	MicroClean	

Regulatory Compliance
REACH EC 1907/2006
EC 1935/2004
EG 10/2011
FDA (Food and Drug Administration)

Performance Data			
Temperature	160 °C	Temperature	260°C ±10°C
Pressure	0,5 bar		
Time	60 sek.		

Additional technical specifications and details regarding the material properties and usage instructions.

Version: 05/2026




特性

BEHAbelt 特性



FDA/EC 符合



防静电



X 射线穿透 PU SAFE 符合




抗菌



防水



超洁净



耐紫外线



双组分




纯素



符合 ISO 340



柔软



耐磨

应用

应用



PU TPE 符合 符合 PU TPE 符合 PU TPE 符合/符合 符合 符合 PU 符合