





Material: NP

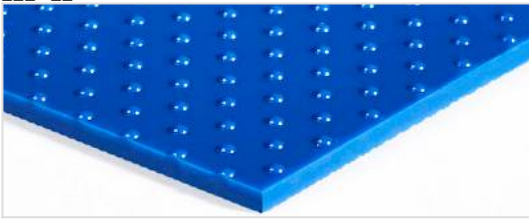

Material: FFI

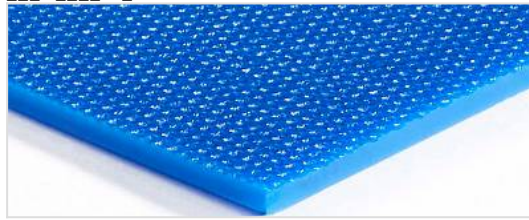

Material: **PU65A**

Material: **FBFG750X2LB**



| Dimensions | | Weight | |
|------------|-------|-------------------|-----------------------|
| Thickness | 2 mm | Weight | 2,4 kg/m ² |
| Width | 15 mm | Temperature Range | -30°C...+40°C |
| Length | 15 mm | Width | 750 mm |
| | | Length | 730 mm |
| | | Weight | |

| Property | NP | FFI |
|------------------|------------------------------------|------------------------------------|
| Shore A | 72° Shore A (±3) | 72° Shore A (±3) |
| Permeability (μ) | n/a | 0,7 |
| Color | | |
| Material | n/a | n/a |
| Material | NP | FFI |
| Material | FDA (Food and Drug Administration) | FDA (Food and Drug Administration) |
| Material | | |
| Material | | |
| Material | | |
| Material | | |
| Material | MicroClean | |

| |
|------------------------------------|
| REACH EC 1907/2006 |
| EC 1935/2004 |
| FDA (Food and Drug Administration) |

| Performance | |
|-------------|-------------|
| Temperature | 150 °C |
| Pressure | 0,5 bar |
| Time | 90 sek. |
| Temperature | 260°C ±10°C |

Standard information line.

05/2026




Icons

BEHAbelt icons



FDA/EC icons



Electrical safety icons



X-ray safe PU SAFE icons




Microorganism icons



Waterproof icons



Cleanroom icons



UV resistant icons



2K icons




Vegan icons



ISO 340 icons



Curved belt icons



Belt cross-section icons

Applications

Applications



PU TPE belts, PU TPE belts, PU TPE belts, PU belts, PU belts